


piston seal K08-D

seal spec

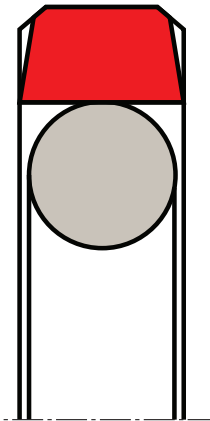

description

O-Ring activated symmetric PTFE piston seal, low friction. for extreme low or highspeed, suitable for positioning functions. for mobile hydraulics, machine tools, injection moulding machines, heavy hydraulics. K08-D is used where a piston has pressure on both sides. K08-D is provided with pressure-compensation grooves for rapid pressure change. very high resistance to pressure and hardness, good thermal conductivity, very good protection against extrusion, high resistance to abrasion, low friction, free of stick-slip.

- asymmetric double-acting composite rod seals, with a gliding part made of low-friction material and an elastic preload element.
- interference fit on the inside diameter.
- various materials are available for different purposes.
- snaps into simple grooves (see notes on installation).
- the generously dimensioned chamfer reduces the risk of gap extrusion.
- good sealing effect across a wide temperature range.
- for pressures up to 400 bar (in special cases up to 800 bar) as a seal between pressurised spaces.
- good static and dynamic sealing.
- suitable for short and long travel with extremely slow or quick movements.
- no stick-slip.
- small break-away load after prolonged periods of standstill.
- exact positioning due to little friction.
- high mechanical efficiency.
- insensitive to thermal damage caused by air in the oil.
- no drag pressure build-up.
- radial grooves assure a fast pressure activation of the seal (design and arrangement see "fabrication tolerances for machined seals" ES 222.308-D).
- this seal can run over holes which are smaller than nominal seal height if the holes have suitable chamfered edges.

application



not bolded symbols; please consult our technical for application limitations

category of profile

machined or molded/standard/trade product.

double acting

the K08-D seal is designed for use as a piston seal.

area of application: hydraulics

- reciprocating pistons on hydraulic cylinders, small swiveling motion permissible.
- as piston seal for small permissible frictional forces or if smooth running is required.
- for heavy-duty operating conditions, profile K08-DS is preferred.
- dimensions according to ISO 7425 part 1 are common, as well as standard types that differ slightly in the depth of the mounting space. for specific dimensions see "range of profile sizes".

note

- the calculation program is based on mounting spaces according to ISO 7425, part 1. intermediate sizes are possible, with an O-ring for standard sizes. for deviating dimensions, use K08-DS. attention must be given to a balanced ratio between sealing part and preload element.
- because of the fluid transport between the pressurized spaces this seal is only suitable to seal same media.

function

K08-D profiles are composite piston seals designed to seal between two pressurised spaces; mainly for reciprocating movements. the design is based on application in standard hydraulic systems with conventional hydraulic oils.

the operating parameters are as defined in the sealing data sheet and material data. requirements deviating from these parameters can be met to a certain degree by changing the geometry in the software program.



operating parameters & material

diameter range: up to 600 mm

material		temperature	max. surface speed	max. pressure ¹	hydrolysis	dry running	wear resistance
sealing element	energizer						
s-mart PTFE glass	s-mart NBR	-30 °C ... +100 °C	10 m/s	400 bar (40 MPa)	-	++	+
s-mart PTFE bronze	s-mart NBR	-30 °C ... +100 °C	10 m/s	400 bar (40 MPa)	-	++	+
s-mart PTFE carbon	s-mart NBR	-30 °C ... +100 °C	10 m/s	400 bar (40 MPa)	-	++	+
s-mart PTFE glass	s-mart FKM	-20 °C ... +200 °C	10 m/s	400 bar (40 MPa)	-	++	+
s-mart PTFE bronze	s-mart FKM	-20 °C ... +200 °C	10 m/s	400 bar (40 MPa)	-	++	+
s-mart PTFE carbon	s-mart FKM	-20 °C ... +200 °C	10 m/s	400 bar (40 MPa)	-	++	+
s-mart PTFE glass	s-mart EPDM ²	-50 °C ... +150 °C	10 m/s	400 bar (40 MPa)	++	++	+
s-mart PTFE bronze	s-mart EPDM ²	-50 °C ... +150 °C	10 m/s	400 bar (40 MPa)	++	++	+
s-mart PTFE carbon	s-mart EPDM ²	-50 °C ... +150 °C	10 m/s	400 bar (40 MPa)	++	++	+
s-mart PTFE glass	s-mart MVQ	-60 °C ... +200 °C	10 m/s	400 bar (40 MPa)	++	++	+
s-mart PTFE bronze	s-mart MVQ	-60 °C ... +200 °C	10 m/s	400 bar (40 MPa)	++	++	+
s-mart PTFE carbon	s-mart MVQ	-60 °C ... +200 °C	10 m/s	400 bar (40 MPa)	++	++	+
s-mart UHMWPE	s-mart MVQ	-60 °C ... +80 °C	10 m/s	400 bar (40 MPa)	++	+	+
s-mart XPU	s-mart NBR	-30 °C ... +110 °C	5 m/s	600 bar (40 MPa)			

the stated operation conditions represent general indications. it is recommended not to use all maximum values simultaneously. surface speed limits apply only to the presence of adequate lubrication film.

¹ pressure ratings are dependent on the size of the extrusion gap.

² attention: not suitable for mineral oils!

- ++ ... particularly suitable
- + ... suitable
- o ... conditional suitable
- ... not suitable

for detailed information regarding chemical resistance please refer to our "list of resistance". for decreased leakage rates elastomer materials (polyurethane or rubber) in other sealing systems are to be preferred.

note on special materials:

as temperature limit and chemical resistance are determined by the preload element, the temperature range can be increased and the resistance to chemical influences improved, if a special material is used for the preload element.

gap dimension

operating pressure	cs = (∅D - ∅d)/2 mm						
	2,45	3,75	5,5	7,75	10,5	12,25	14
safe extrusion gap (mm)							
100 bar (10 MPa)	0,27	0,33	0,38	0,43	0,50	0,55	0,60
200 bar (20 MPa)	0,19	0,25	0,28	0,33	0,37	0,43	0,45
300 bar (30 MPa)	0,17	0,20	0,22	0,25	0,30	0,34	0,38
400 bar (40 MPa)	0,16	0,18	0,19	0,21	0,25	0,28	0,30

important note:

the above data are maximum value and can't be used at the same time. e.g. the maximum operating speed depend on material type, pressure, temperature and gap value. temperature range also dependent on medium.

the table refers to a operating temperature of 80°C. temperatures below may increase the safe extrusion gap slightly, at temperatures above 80 °C, the gap dimensions has to be reduced or a stronger profile selected.

for extrusion gap sizes resulting from tolerance pair H8/f8 pressure ranges above 400 bar can be reached in special cases, influences due to thermal expansion have to be considered. we recommend to contact our technical department.

surface quality

surface roughness	Rtmax (µm)	Ra (µm)
sliding surface	≤2	≤0,05-0,3
bottom of groove	≤6,3	≤1,6
groove face	≤15	≤3

tolerance recommendation

seal housing tolerances	
∅d	h10
∅D	H9




mode of installation


in case of closed grooves, it is not recommended to slip the seal over the piston by hand (uneven material deformation in the sealing part). after the O-Ring is placed into the groove, the sealing part should be stretched over a installation cone by using a sleeve (assembly aid tools).

a recovery of the sealing part with a calibrating sleeve is advisable, however, a special shaped insertion chamfer on the cylinder barrel can also be designed (danger of tilting).

values for "c" see insertion chamfer.

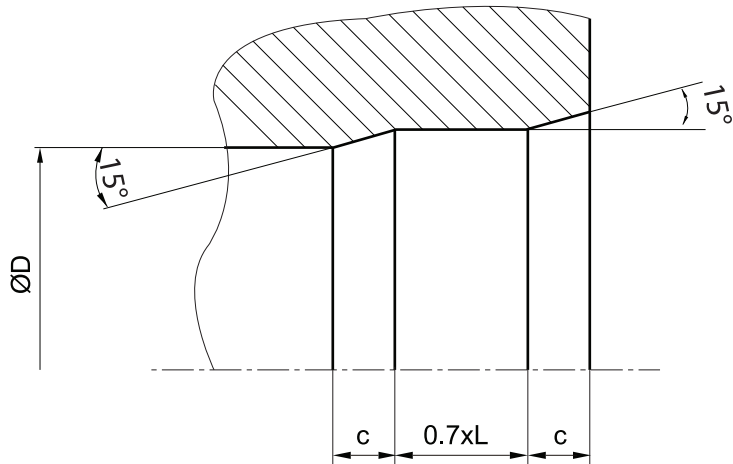

recommended mounting space:

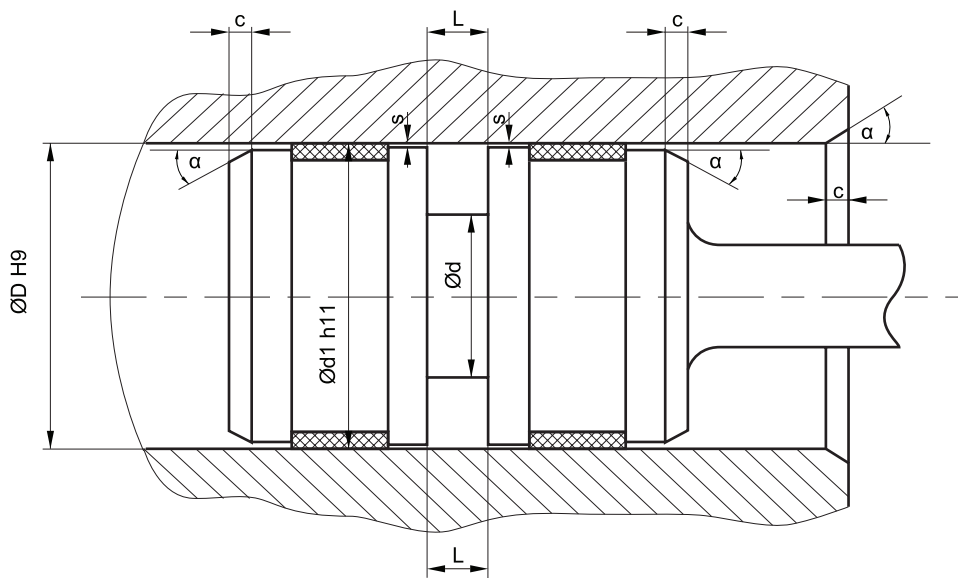



insertion chamfer:


in order to avoid damage to the piston seal during installation, the piston and the housing is to be chamfered and rounded as shown in the "recommended mounting space" drawing. the size of chamfer depends on the seal type and profile width.

cs (mm)	c (mm)	
	$\alpha = 15^\circ \dots 20^\circ$	$\alpha = 20^\circ \dots 30^\circ$
2,45	2,5	1,5
3,75	3,5	2
5,5	4,5	3
7,75	5	3,5
10,5	6	5
12,25	8	6
14	10	7

instead of a chamfer, the piston can also be designed with a radius. recommended size of the radius is equal to size of chamfer ($R=c$).

seal & housing recommendations

please note that we are able to produce those profiles to your specific need or any non standard housing. for detail measurements, please see seal-mart catalog...

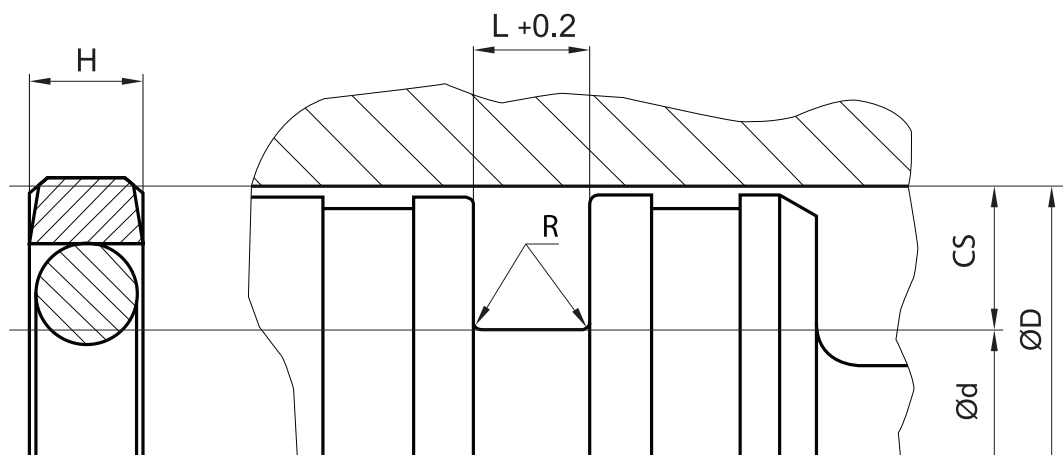

the ratio between nominal width and seal height should be in accordance to ISO 7425 part 1. we recommend the following values:


ØD [mm]	Ød [mm]	L [mm]	$cs = (\text{ØD} - \text{Ød})/2$ [mm]
8 ~ 14,9	$\text{ØD} - 4,9$	2,2	2,45
15 ~ 39,9	$\text{ØD} - 7,5$	3,2	3,75
40 ~ 79,9	$\text{ØD} - 11$	4,2	5,5
80 ~ 132,9	$\text{ØD} - 15,5$	6,3	7,75
133 ~ 329,9	$\text{ØD} - 21$	8,1	10,5
330 ~ 669,9	$\text{ØD} - 24,5$	8,1	12,25
670 ~ 1000	$\text{ØD} - 28$	9,5	14
> 1000	$\text{ØD} - 28$	9,5	14

L	R
$\leq 4,2$	max. 0,5
$> 4,2 \dots \leq 6,3$	max. 0,8
$> 6,3 \dots \leq 8,1$	max. 1,2
$> 8,1$	max. 2

in case of large deviations of L use K08-DS



fitted:

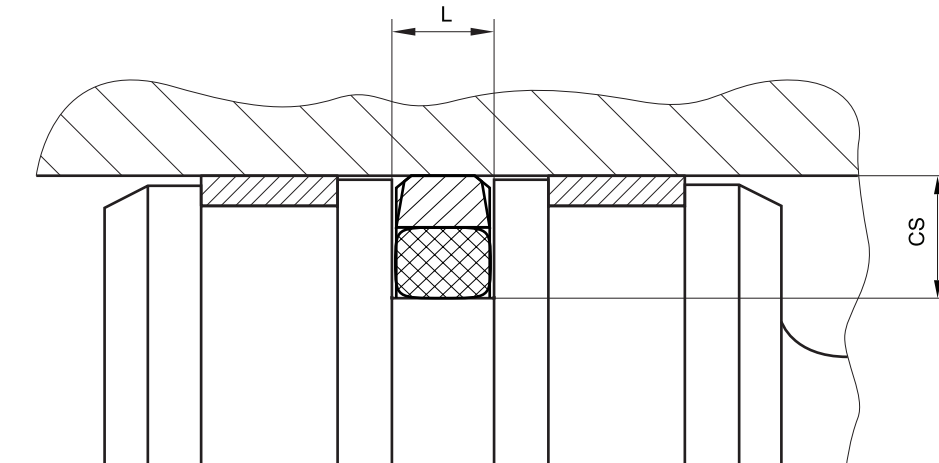

don't hesitate to contact our technical department for further information or for special requirements (temperature, speed etc.), so that suitable materials and/or designs can be recommended.